



**SOUNDTUBE®**  
E N T E R T A I N M E N T

## AC-RS-SM5 Install instructions

The AC-RS-SM5 bracket must be securely attached to the mounting surface. This means that the bracket must be mounted to a wall stud or other suitable mounting surface to support the weight of the speaker. **DO NOT MOUNT THIS BRACKET DIRECTLY TO WALL BOARD OR SHEET ROCK!**


THIS BRACKET IS DESIGNED TO MOUNT THE RS500i, RS400i, AND RS4-EZ MODEL SPEAKERS **ONLY**. DO NOT USE THIS BRACKET TO MOUNT ANY OTHER MODEL SPEAKER.

### Included parts:


- (1) AC-RS-SM5 surface mount bracket
- (1) Safety cable
- (1) ¼-20 Socket Head Cap Screw (SHCS)
- (1) ¼" Flat washer
- (1) ¼" Split lock washer
- (1) ¼-20 Button head cap screw
- (1) ¼-20 nut/star washer combo

### Installation


1. Locate the desired mounting location for the speaker. Mount the AC-RS-SM5 to the wall using appropriate screws (not included). The bracket is designed to accept a standard ¼" lag screw with washer.
2. Attach one end of the safety cable (supplied) to the wall. The cable can be mounted under one of the bracket mounting screws.

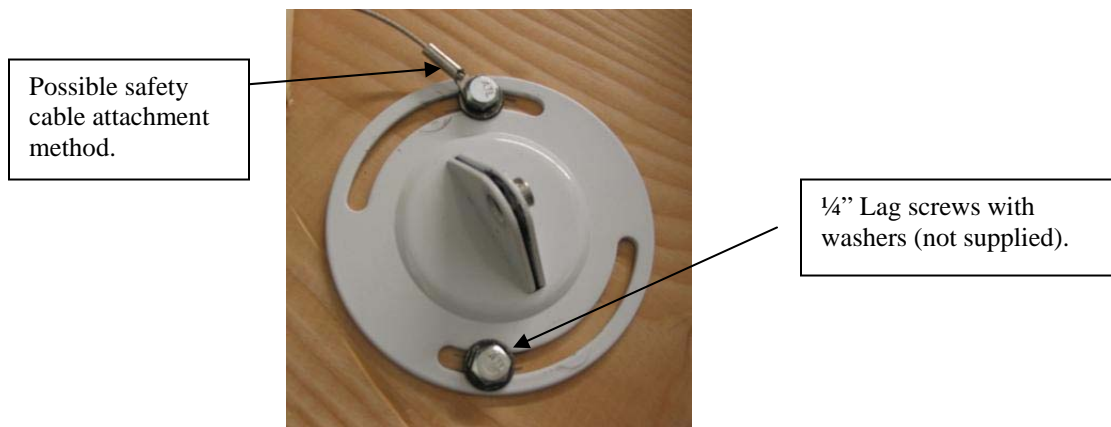


3. Adjust the bracket to the desired rotation angle before mounting the speaker.

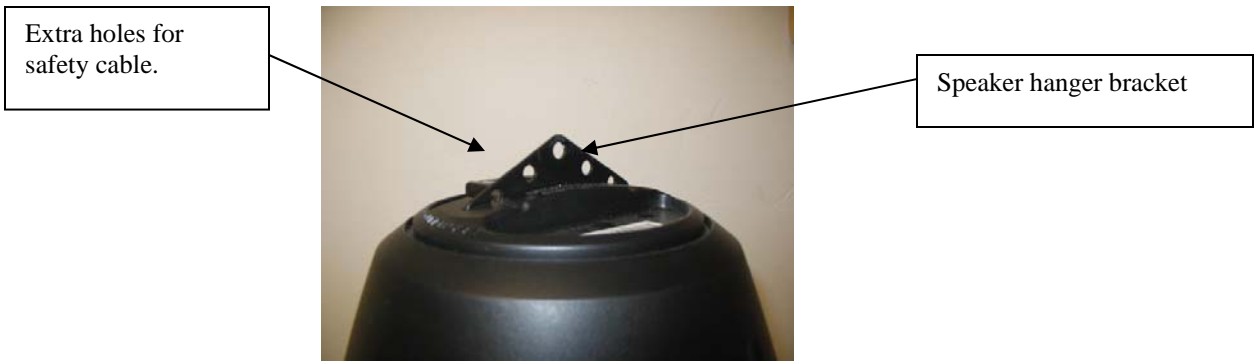

4. Place the speaker hanger bracket into the slot on the AC-RS-SM5 and secure it with the supplied 1/4 - 20 Socket Head Cap Screw. Be sure to use the flat washer and split ring lock washer (supplied) on the 1/4-20 SHCS as shown below.

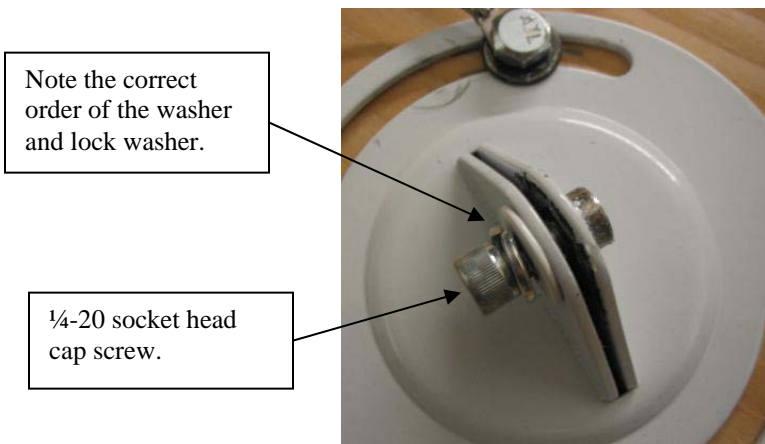

5. Attach the safety cable to one of the extra holes in the speaker hanger bracket using the 1/4 - 20 button head cap screw and nut/star washer (supplied).
6. Attach the speaker input connector and the rubber, weather terminal boot.
7. Be sure to tighten the bracket mounting screws and the speaker clamping screw firmly after making the final adjustments to the bracket angle and speaker angle.

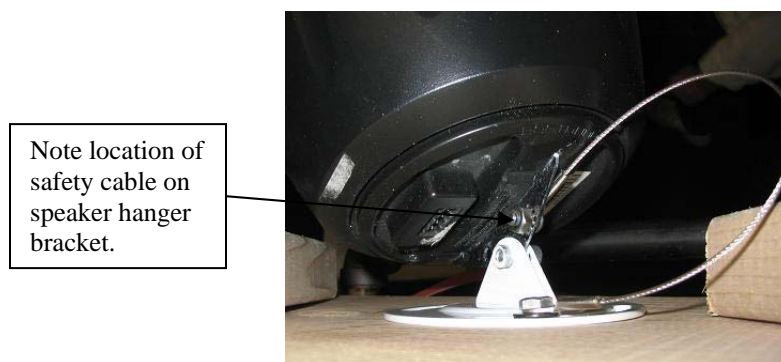

Bracket and safety cable installed.