





**SMi Series**

**Install Instructions For:**  
SM500i speaker pole mount


1.435.647.9555 | 800.647.TUBE | www.soundtube.com




**1.** Unpack speaker and SpeedLever™ mounting hardware.




**2.** Attach safety cable with mounting nut and bolt (not supplied) through eyelet in supplied safety cable on rear face of bracket.

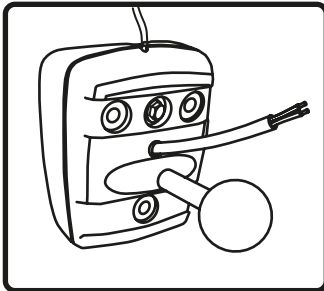

**3.** Thread signal wire through hole in center of bracket and pole mount.

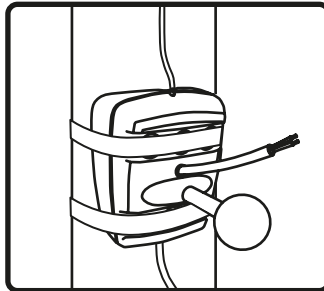


**4.** Secure mounting bracket to pole with metal strap (not provided). Max strap width: 19.05 mm (.75 in). Min. pole dia. 50.8 mm (2 in)

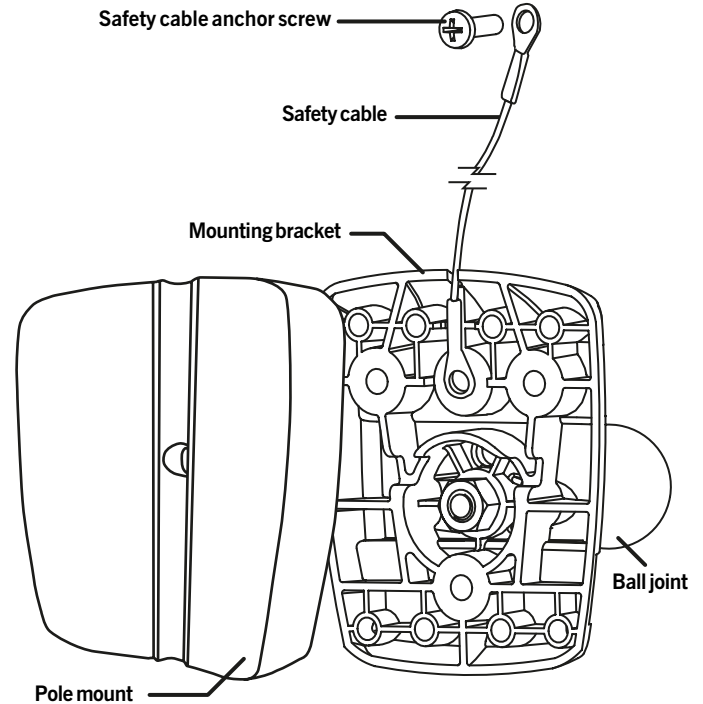


**Warning**  
SoundTube speakers must be installed by a professional audio installer/contractor. For safety and for optimum audio performance, installer must follow all directions issued by SoundTube Entertainment.


**Warning**  
Do not spec or install speaker near support beam, ventilation duct or other structure that may interfere with speaker function or dispersion.

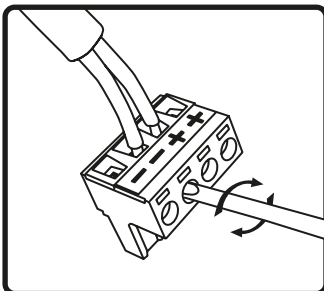


**5.** Follow Instructions in speaker box for connecting signal wire to speaker.

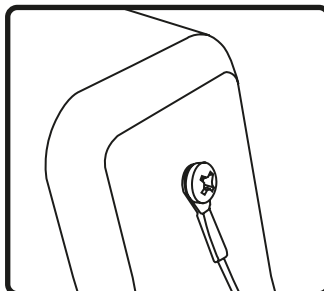

**6.** Use supplied screw to connect the safety cable to the insert on the rear panel of the speaker.

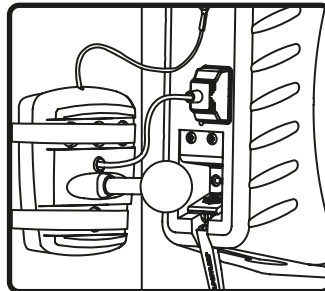

**7.** Mount the speaker to the bracket by positioning ball joint in the center of the clamping cavity. Push the speaker onto the ball, ensuring proper positioning. When repositioning the speaker, it may be necessary to use supplied ball joint anchor pad for maximum support.

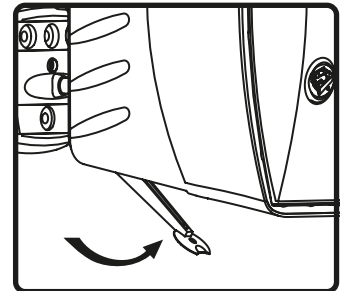

**8.** Aim the speaker and lock the lever, **then use the theft-resistant screw to secure the lever in position.** Open SpeedLever to reposition speaker.

**DO NOT TWIST Speaker after lever is locked.**